AIR, WATER, NOISE AND METEOROLOGICAL MONITORING – DECEMBER 2020

PINE DALE MINE, BLACKMANS FLAT

Prepared for Pine Dale Mine Community Consultative Committee

Prepared by RCA Australia

RCA ref 6880-1843/0

RCA AUSTRALIA
GEOTECHNICAL • ENVIRONMENTAL

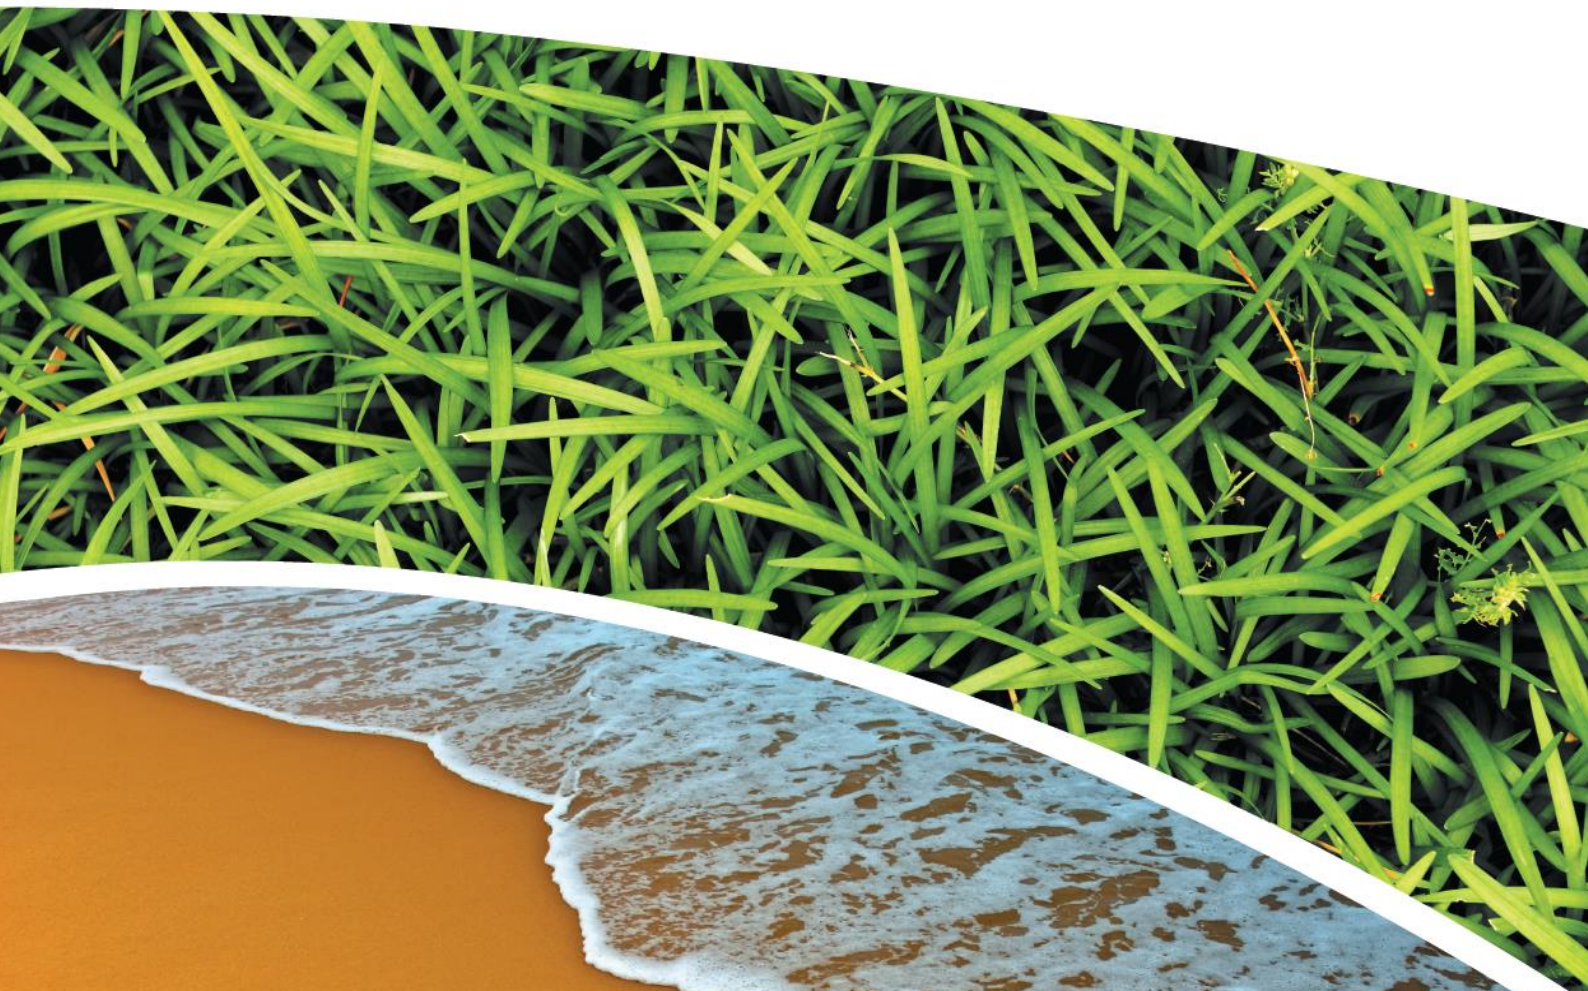

RCA AUSTRALIA
ABN 53 063 515 711

92 Hill Street, CARRINGTON NSW 2294

Telephone: +61 2 4902 9200
Facsimile: +61 2 4902 9299
Email: administrator@rca.com.au
Internet: www.rca.com.au

DOCUMENT STATUS						
Rev No	**Comment**	**Author**	**Reviewer**	**Approved for Issue (Project Manager)**		
				Name	**Signature**	**Date**
/0	Final	K Davies	C Rocher	C Rocher		15.01.2021

DOCUMENT DISTRIBUTION				
Rev No	**Copies**	**Format**	**Issued to**	**Date**
/0	1	Electronic (email)	Pine Dale Mine – Graham Goodwin graham.goodwin@energyaustralia.com.au	15.01.2021
/0	1	Electronic (email)	Energy Australia- Mark Frewin mark.frewin@energyaustralia.com.au	15.01.2021
/0	1	Electronic report	RCA – job archive	15.01.2021

Contents

RCA ref 6880-1843/0

15 January 2021

Enhance Place Pty Ltd
PO Box 202
WALLERWANG NSW 2845

Attention: Mr Graham Goodwin

RCA AUSTRALIA
GEOTECHNICAL • ENVIRONMENTAL

Geotechnical Engineering
Engineering Geology
Environmental Engineering
Hydrogeology
Construction Materials Testing
Environmental Monitoring
Sound & Vibration
Occupational Hygiene

REPORT COMPILED FOR COMMUNITY CONSULTATIVE COMMITTEE DETAILING AIR, WATER AND METEOROLOGICAL MONITORING AT PINE DALE DECEMBER 2020

1 INTRODUCTION

This report presents the results of air, water, noise and meteorological monitoring undertaken at Pine Dale Mine, Blackmans Flat during the month of December 2020.

Air and water samples were collected by RCA Laboratories – Environmental staff. Meteorological data was obtained from the site weather station.

This report satisfies the requirements to monitor environmental parameters as presented in the Pine Dale Mine Environmental Protection Licence (EPL 4911).

2 ANALYTICAL PROCEDURES

The analytical procedures used by RCA Laboratories – Environmental (NATA Accreditation number 9811) are based on established internationally recognised procedures such as APHA and Australian Standards. Analytical test methods are detailed in **Table 1**.

Table 1 *Analytical Test Methods*

Analysis	Method	Units	Analysing Laboratory	NATA Accreditation Status
Determination of Suspended Particulate Matter	ENV-LAB003	µg/m^3	RCA Laboratories – Environmental	NATA Analysis
Determination of Particulate Matter – Deposited Matter	ENV-LAB004	g/m^2 per month	RCA Laboratories – Environmental	NATA Analysis
pH	ENV-LAB006	pH	RCA Laboratories – Environmental	NATA Analysis
Conductivity	ENV-LAB010	µS/cm	RCA Laboratories – Environmental	NATA Analysis
Total Suspended Solids	ENV-LAB009	mg/L	RCA Laboratories – Environmental	NATA Analysis
Turbidity	ENV-LAB037	NTU	RCA Laboratories - Environmental	NATA Analysis
Oil and Grease	ENV-LAB022	mg/L	RCA Laboratories - Environmental	Non-NATA Analysis
Major Anions (Alkalinity, Cl, SO_4)	ED037, ED041, ED045	mg/L	ALS	NATA Analysis
Major Cations (Ca, Mg, Na, K)	ED093	mg/L	ALS	NATA Analysis
Dissolved Metals	EG020F	mg/L	ALS	NATA Analysis

ALS Environmental has been used to obtain analysis of anions, cations and dissolved metals (NATA Accreditation number 825).

3 WATER MONITORING RESULTS

3.1 GROUNDWATER

A total of two (2) groundwater samples were collected from within the Pine Dale Mine site during December 2020. Water quality analysis results are shown in **Table 2**. Groundwater monitoring locations are shown in **Appendix A**.

Table 2 *Groundwater Analysis Results*

ANALYSIS	UNITS	P6	P7
Sample Number	-	12206880009	12206880010
Date Sampled	-	03/12/20	03/12/20
Time Sampled	-	15:00	16:03
Depth to Water from Surface	m	23.38	5.32
Water Level (AHD)	m	893.57	889.08
Temperature	°C	19.4	16.4
pH	pH	6.27	6.36
Conductivity	µS/cm	**1690**	763
Turbidity	NTU	28	
Dissolved Oxygen	mg/L	1.8	
Total Suspended Solids	mg/L	41.0	
Oil and Grease	mg/L	<5	
Bicarbonate Alkalinity ($CaCO_3$)	mg/L	93	
Total Alkalinity ($CaCO_3$)	mg/L	93	
Sulphate (as SO_4)	mg/L	748	
Chloride	mg/L	57	
Calcium	mg/L	155	
Magnesium	mg/L	72	
Sodium	mg/L	85	
Potassium	mg/L	20	
Cobalt (dissolved)	mg/L	0.046	
Manganese (dissolved)	mg/L	2.65	
Nickel (dissolved)	mg/L	0.099	
Zinc (dissolved)	mg/L	0.04	
Iron (dissolved)	mg/L	39.6	
Trigger Values			
pH trigger level[a]	pH	6.2 – 8.0	6.3 – 8.0
Conductivity trigger level	µS/cm	1180	852
Water Level (AHD)[b]	m	887.90	883.28
Revised Trigger Values[c]			
pH trigger level[d]	pH	5.6	6.3
Water Level (AHD)[b]	M	887.9	--

Indicates analysis was not required.

[a] pH trigger value is exceeded if the pH is outside the nominated range.

[b] Water Level trigger is exceeded if the AHD water level drops below the nominated trigger level.

[c] Proposed trigger values to be used alongside the currently approved trigger values.

[d] pH trigger value is exceeded if pH is below the nominated value.

Results shown in **bold** indicates exceedance of trigger value.

Results shown in <u>underline</u> indicates exceedance of revised trigger value.

3.2 SURFACE WATER MONITORING

Quarterly surface water monitoring was not required to be undertaken during December 2020.

4 AIR QUALITY RESULTS

4.1 HIGH VOLUME AIR SAMPLERS (HVAS)

Monitoring for TSP and PM_{10} using HVAS was removed from Environment Protection Licence 4911 in November 2020. The Pine Dale Mine Air Quality and Greenhouse Gas Management Plan (AQGGMP) was reviewed and updated to reflect this change. The updated AQGGMP was submitted to the Department of Planning, Industry and Environment (DPIE) for endorsement. The AQGGMP was endorsed by DPIE on 4 December 2020 and was subsequently uploaded onto the Pine Dale Mine website.

4.2 DEPOSITIONAL DUST MONITORING

The depositional dust monitoring exposure period for December 2020 was 2 November – 4 December 2020. Depositional dust gauges at this facility conform to AS/NZS 3580.10.1:2016 and AS/NZS 3580.1.1:2016. The December exposure period was 32 days which is within the 30 ± 2 days dust exposure period stipulated in AS/NZS 3508.10.1:2016. Depositional dust monitoring results are shown in **Table 3**. Depositional dust monitoring locations are shown in **Appendix A**.

Table 3 *Depositional Dust Monitoring*

Deposit Gauge	Number of Days	Notes	Insoluble Solids	Ash	Combustible Matter
D1	32	IT	0.9	0.3	0.6
D3	32	I	1.3	0.8	0.5
D4	32	IT	0.8	0.4	0.4
D5	32	I	0.6	0.2	0.4
D6	32	I	0.4	0.1	0.3

All units are g/m^2/month
I – Insects (eg, Ants, Spiders)
T – Tree litter (leaves, gumnuts)

4.2.1 ALLOWABLE DEPOSITIONAL DUST LIMITS

The EPA long term (annual average) deposited dust limit is $4g/m^2$ per month. The rolling annual average depositional dust results for all sites within the period (January 2020 – December 2020) are in compliance with consent conditions. The annual average for dust gauges D1, D3, D4, D5 and D6 are all less than or equal to $1.6g/m^2$ per month. Annual averages are shown in the depositional dust gauge graphs provided in **Appendix B**.

5 METEOROLOGICAL MONITORING

Pine Dale Mine records meteorological data continuously via an onsite weather station. Details of the weather data recorded during the period 1 to 31 December 2020 are shown in **Appendix C**.

Data availability during this period was 100%.

6 BLASTING RESULTS

No blasting was undertaken during this month as mining operations have ceased since the end of March 2014.

7 NOISE MONITORING RESULTS

Quarterly noise monitoring was undertaken at Pine Dale on the 22nd and 23rd December 2020. Results are contained within the Pine Dale Mine Environmental Noise Survey Report (RCA Report 13856-410/0). There was no measured noise contribution from Pine Dale Mine identified during the noise survey.

8 OPERATIONAL ACTIVITIES

All of the approved minable reserves at the Pine Dale Mine have now been exhausted. Operational mining and the last coal sales ceased as of the end of March 2014.

Pine Dale Mine has been placed in care and maintenance since April 2014. All former operators have been made redundant; however, some statutory positions still remain.

9 SUMMARY

During the month of December 2020 environmental monitoring results were found to be generally in compliance with stipulated criteria with the exception of:

- The electrical conduction at groundwater bore P6 was greater than site-specific trigger value.

The revised trigger values do not have a limit for electrical conductivity, as such P6 would be compliant.

All depositional dust gauge results are well below the EPA Long Term (annual average) criteria of 4g/m^2.month based upon a rolling average of the past 12 months.

Meteorological monitoring was undertaken for the entire month of December with 100% data capture.

Quarterly noise monitoring was undertaken during December 2020, noise monitoring survey results shows no noise contribution from Pine Dale Mine.

Pine Dale Mine ceased operation in March 2014 and therefore no blasting occurred at the site.

10 LIMITATIONS

This report has been prepared for Enhance Place Pty Ltd in accordance with an agreement with RCA Australia (RCA). The services performed by RCA have been conducted in a manner consistent with that generally exercised by members of its profession and consulting practice.

This report has been prepared for the sole use of Enhance Place. The report may not contain sufficient information for purposes of other uses or for parties other than Enhance Place. This report shall only be presented in full and may not be used to support objectives other than those stated in the report without written permission from RCA Australia.

The information in this report is considered accurate at the date of issue with regard to the current conditions of the site. Conditions can vary across any site that cannot be explicitly defined by investigation.

Environmental conditions including contaminant concentrations can change in a limited period of time. This should be considered if the report is used following a significant period of time after the date of issue.

Yours faithfully

RCA AUSTRALIA

Katy Davies
Senior Environmental Scientist

Appendix A

Monitoring Locations

EP PDH7/GW Site E

EP DDH7/GW Site A

EP DDH5/GW Site B

EP PDH1/GW Site C

EP DDH4/GW Site D

Water Cart Dam (The Bong sample location)

PCB1

PCB7

EPL Site 2

S1

S2

PCB2

PCB3

NM1

DI

EPL Site 3 (S3)

The Bong

Old Shaft

NM2

D3

NM3

P6

S4

S5

S6

P7

EPL Site 13

D4

NM4

S7

NM6

D6

Blue Lake

Pine Dale Mine

D5

NM5

EPL Site 14

LEGEND

- Noise Monitoring Location
- Depositional Dust Monitoring Location
- Groundwater Monitoring Location
- High Volume Air Sampling Location
- Metorological Monitoring Location
- Surface Water Monitoring Location

0 175 350 700 1,050 1,400

metres

N

RCA AUSTRALIA

GEOTECHNICAL • ENVIRONMENTAL

PINE DALE MINE ENVIRONMENTAL MONITORING LOCATION PLAN

Appendix B

Depositional Dust Graphs

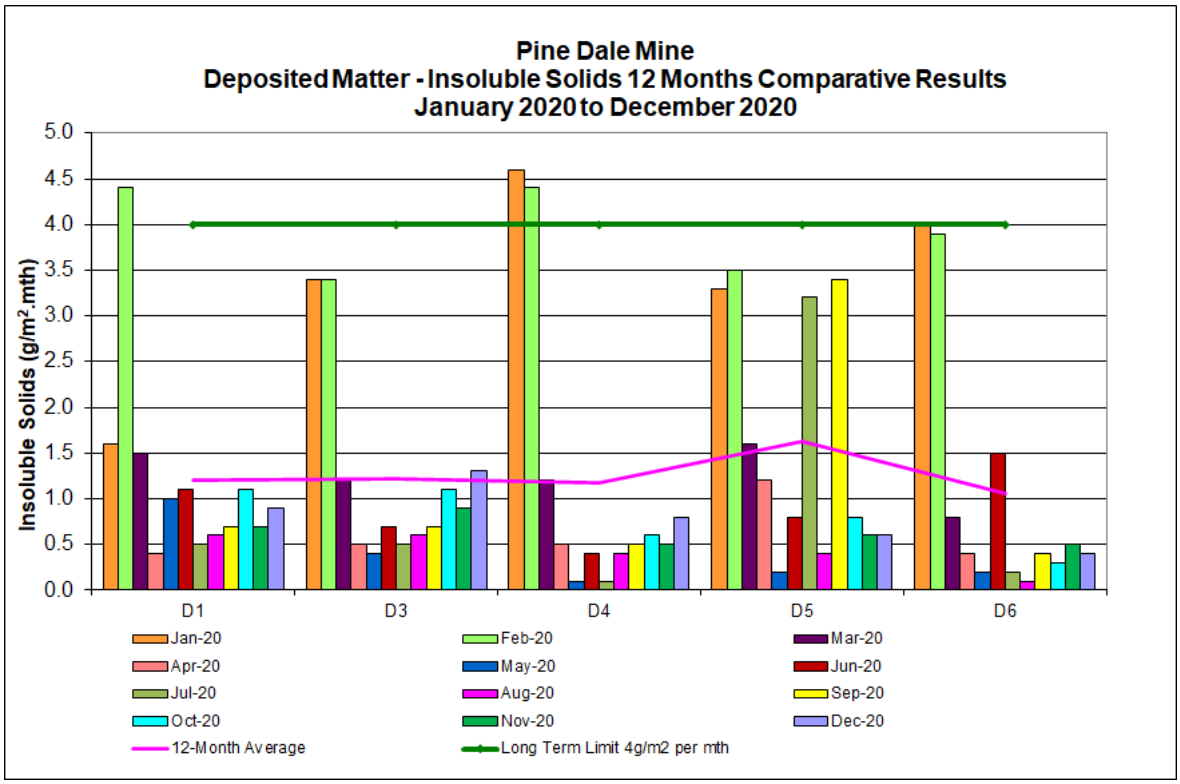
Pine Dale Mine
Deposited Matter - Insoluble Solids 12 Months Comparative Results
January 2020 to December 2020
Insoluble Solids (g/m².mth)
5.0
4.5
4.0
3.5
3.0
2.5
2.0
1.5
1.0
0.5
0.0
D1
D3
D4
D5
D6
Jan-20
Feb-20
Mar-20
Apr-20
May-20
Jun-20
Jul-20
Aug-20
Sep-20
Oct-20
Nov-20
Dec-20
12-Month Average
Long Term Limit 4g/m2 per mth

Appendix C

Meteorological Data

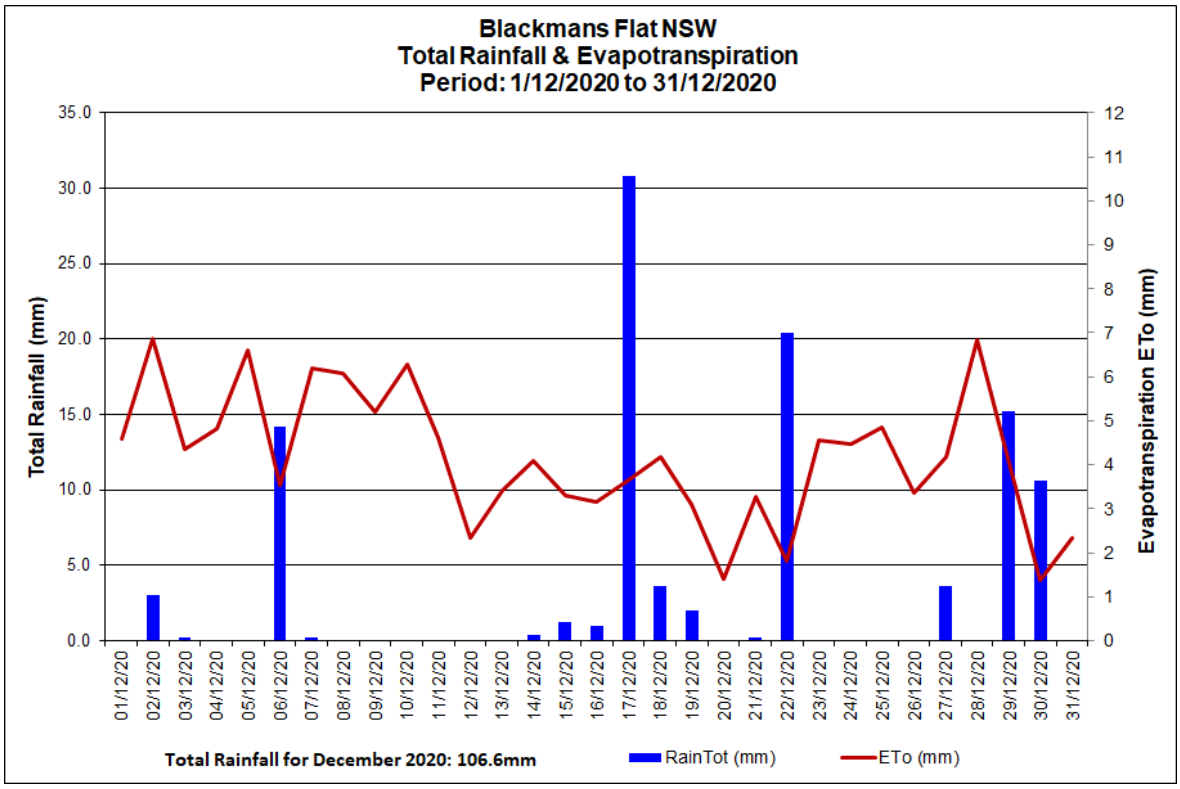
Blackmans Flat NSW
Total Rainfall & Evapotranspiration
Period: 1/12/2020 to 31/12/2020
Total Rainfall (mm)
Evapotranspiration ETo (mm)
Total Rainfall for December 2020: 106.6mm
RainTot (mm)
ETo (mm)

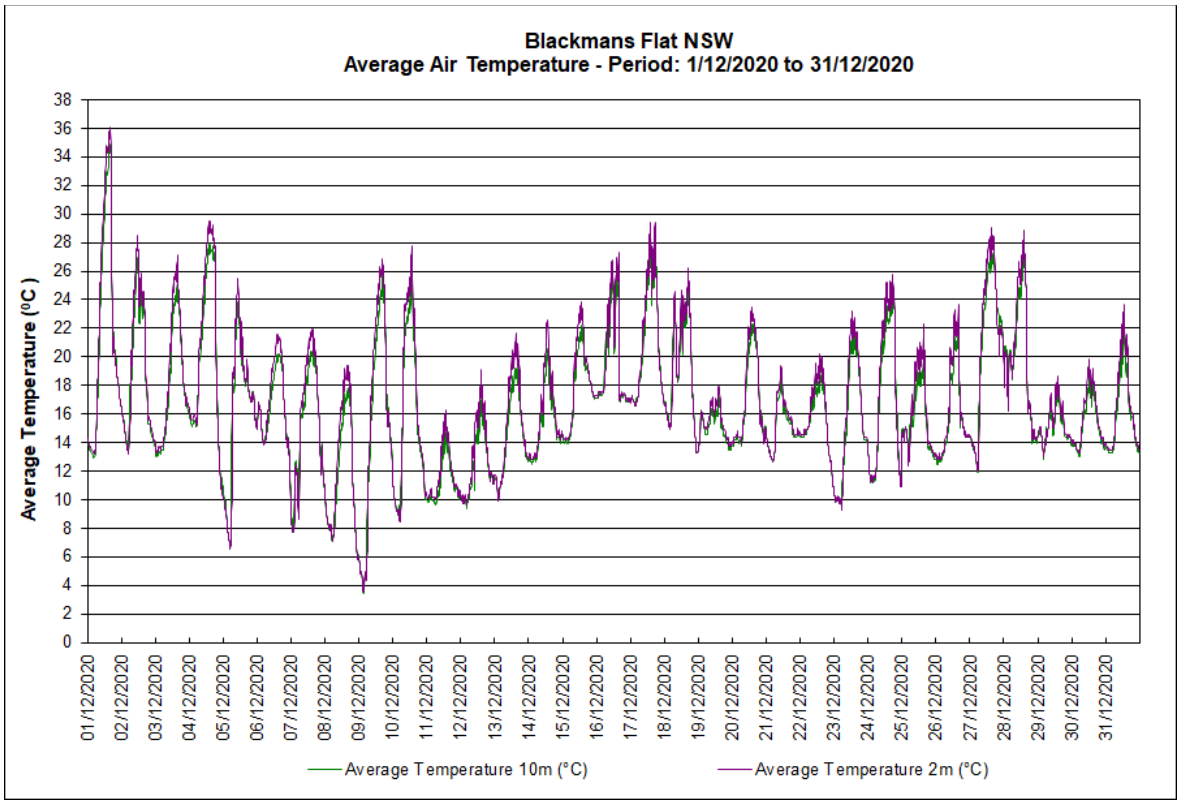
Blackmans Flat NSW
Average Air Temperature - Period: 1/12/2020 to 31/12/2020
Average Temperature (°C)
Average Temperature 10m (°C)
Average Temperature 2m (°C)

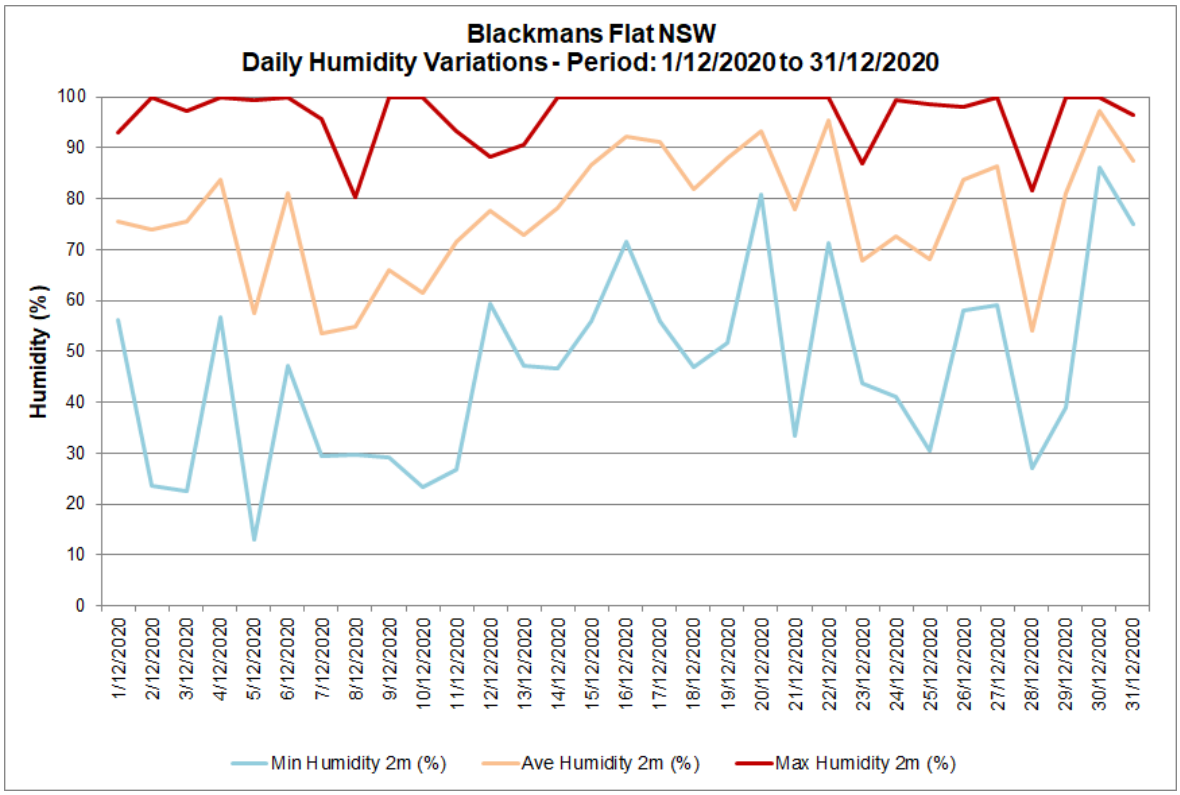
Blackmans Flat NSW
Daily Humidity Variations - Period: 1/12/2020 to 31/12/2020
Humidity (%)
100
90
80
70
60
50
40
30
20
10
0
1/12/2020
2/12/2020
3/12/2020
4/12/2020
5/12/2020
6/12/2020
7/12/2020
8/12/2020
9/12/2020
10/12/2020
11/12/2020
12/12/2020
13/12/2020
14/12/2020
15/12/2020
16/12/2020
17/12/2020
18/12/2020
19/12/2020
20/12/2020
21/12/2020
22/12/2020
23/12/2020
24/12/2020
25/12/2020
26/12/2020
27/12/2020
28/12/2020
29/12/2020
30/12/2020
31/12/2020
Min Humidity 2m (%)
Ave Humidity 2m (%)
Max Humidity 2m (%)

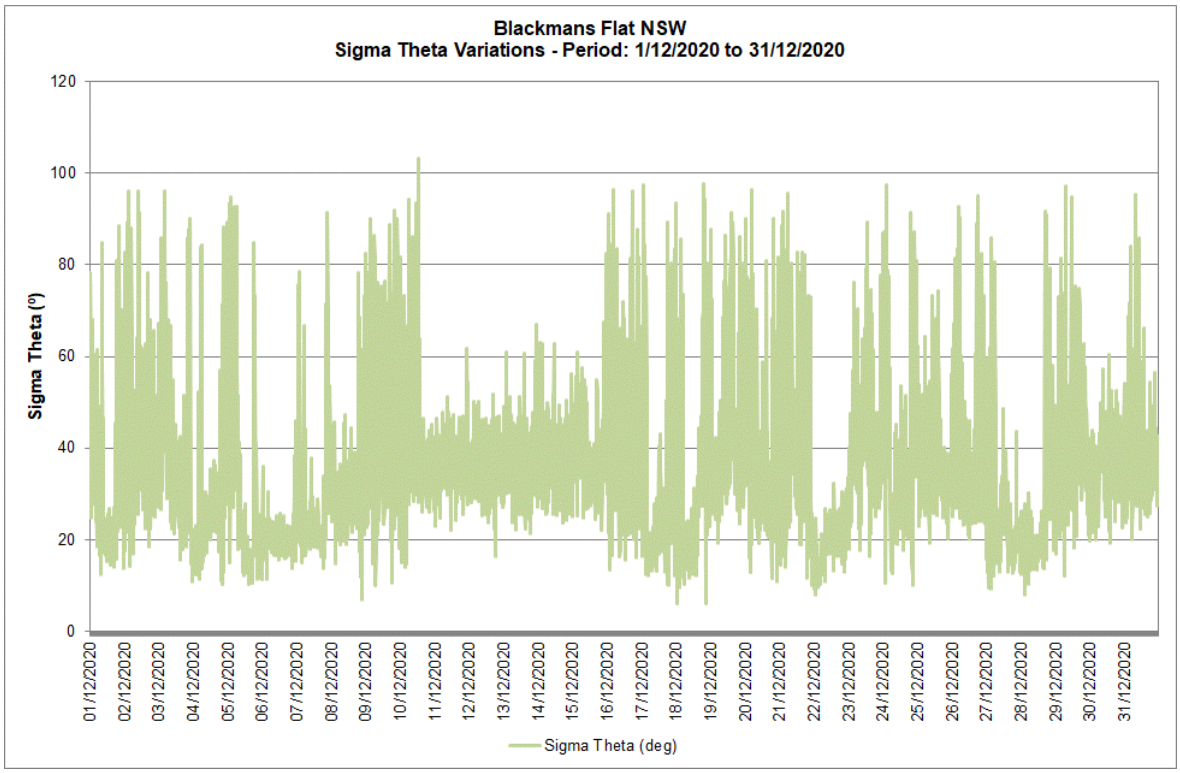
Blackmans Flat NSW
Sigma Theta Variations - Period: 1/12/2020 to 31/12/2020
Sigma Theta (°)
120
100
80
60
40
20
0
01/12/2020
02/12/2020
03/12/2020
04/12/2020
05/12/2020
06/12/2020
07/12/2020
08/12/2020
09/12/2020
10/12/2020
11/12/2020
12/12/2020
13/12/2020
14/12/2020
15/12/2020
16/12/2020
17/12/2020
18/12/2020
19/12/2020
20/12/2020
21/12/2020
22/12/2020
23/12/2020
24/12/2020
25/12/2020
26/12/2020
27/12/2020
28/12/2020
29/12/2020
30/12/2020
31/12/2020
Sigma Theta (deg)

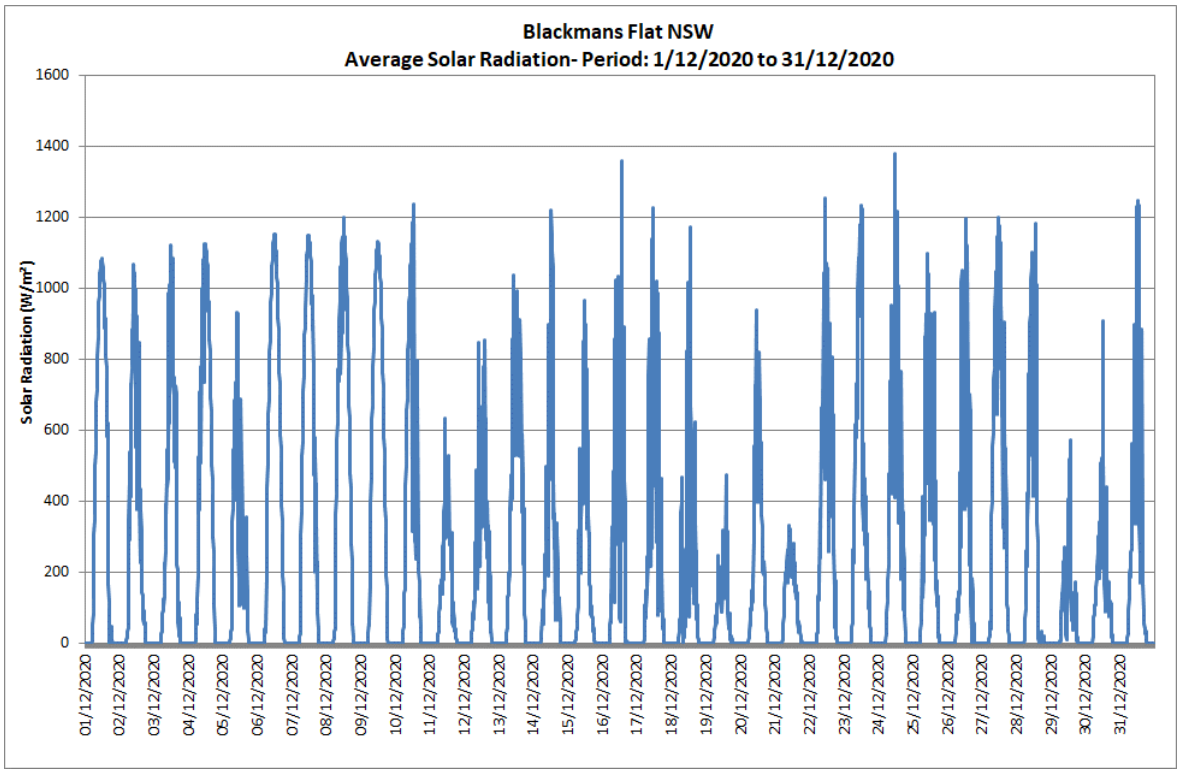
Blackmans Flat NSW
Average Solar Radiation- Period: 1/12/2020 to 31/12/2020
Solar Radiation (W/m²)
1600
1400
1200
1000
800
600
400
200
0
01/12/2020
02/12/2020
03/12/2020
04/12/2020
05/12/2020
06/12/2020
07/12/2020
08/12/2020
09/12/2020
10/12/2020
11/12/2020
12/12/2020
13/12/2020
14/12/2020
15/12/2020
16/12/2020
17/12/2020
18/12/2020
19/12/2020
20/12/2020
21/12/2020
22/12/2020
23/12/2020
24/12/2020
25/12/2020
26/12/2020
27/12/2020
28/12/2020
29/12/2020
30/12/2020
31/12/2020

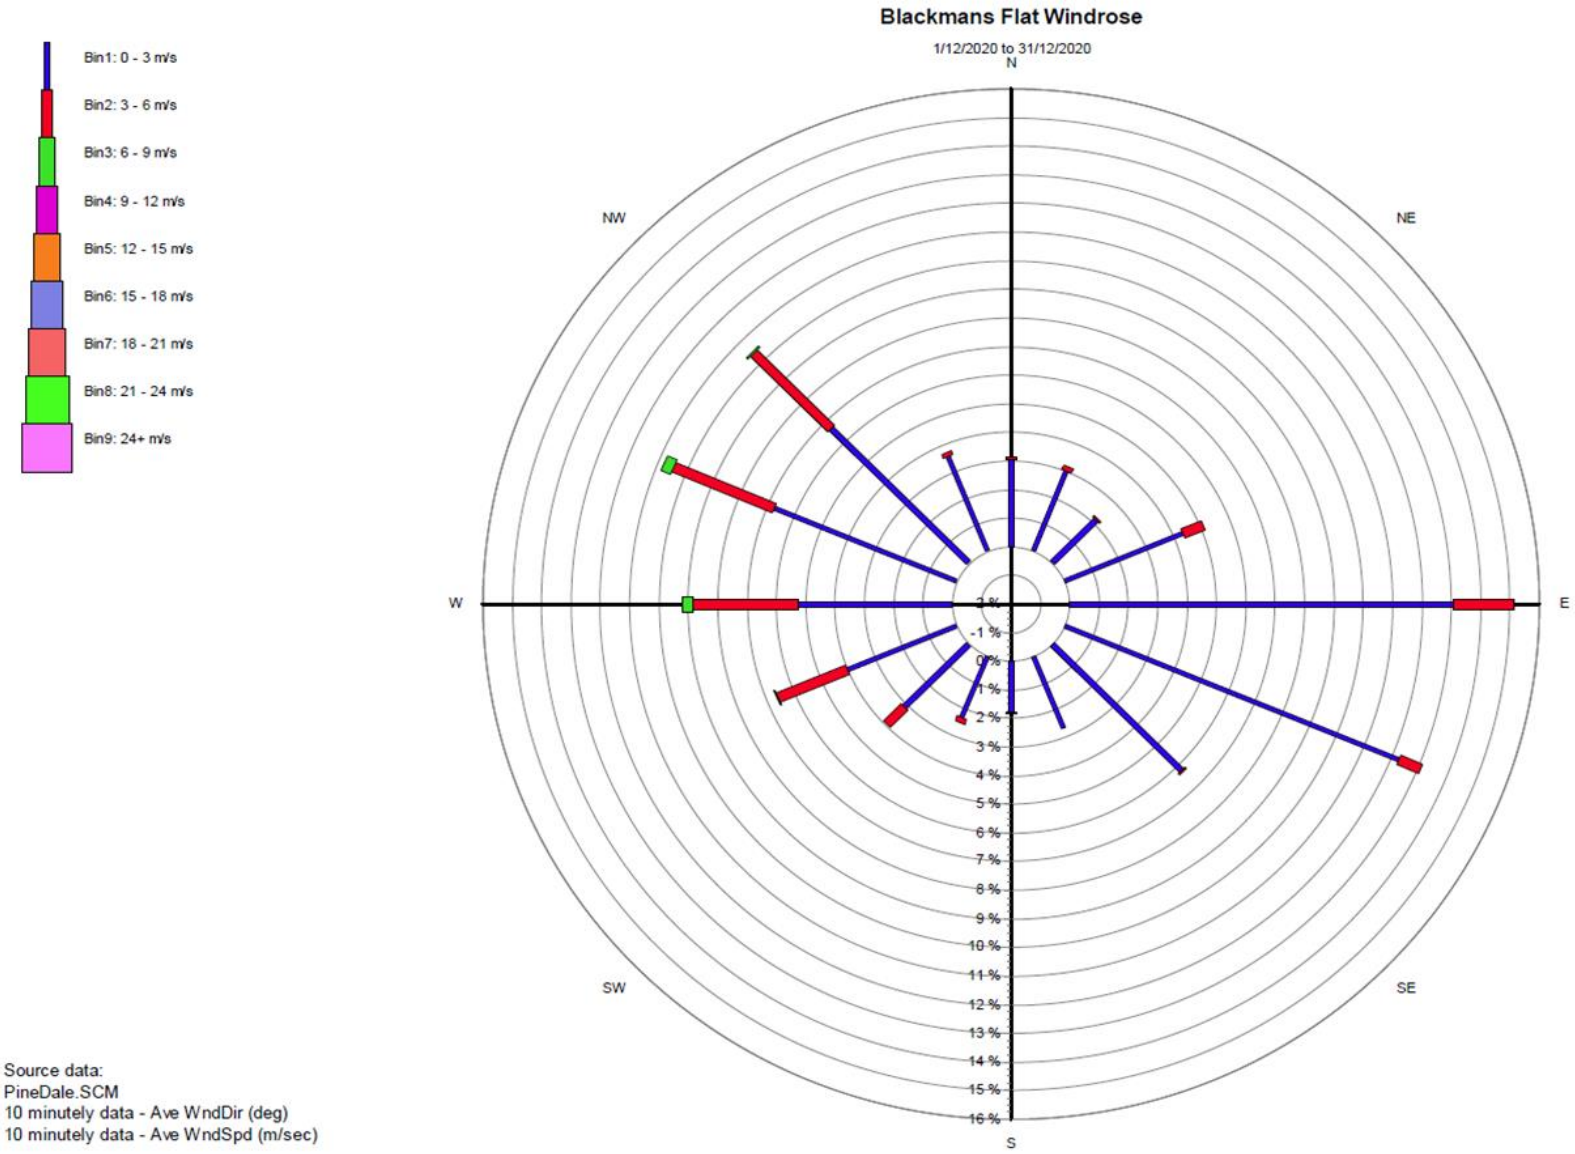

Source data:
PineDale.SCM
10 minutely data - Ave WndDir (deg)
10 minutely data - Ave WndSpd (m/sec)