AIR, WATER AND METEOROLOGICAL MONITORING – FEBRUARY 2019

PINE DALE MINE, BLACKMANS FLAT

Prepared for Pine Dale Mine Community Consultative Committee

Prepared by RCA Australia

RCA ref 6880-1791/0

RCA AUSTRALIA
GEOTECHNICAL • ENVIRONMENTAL

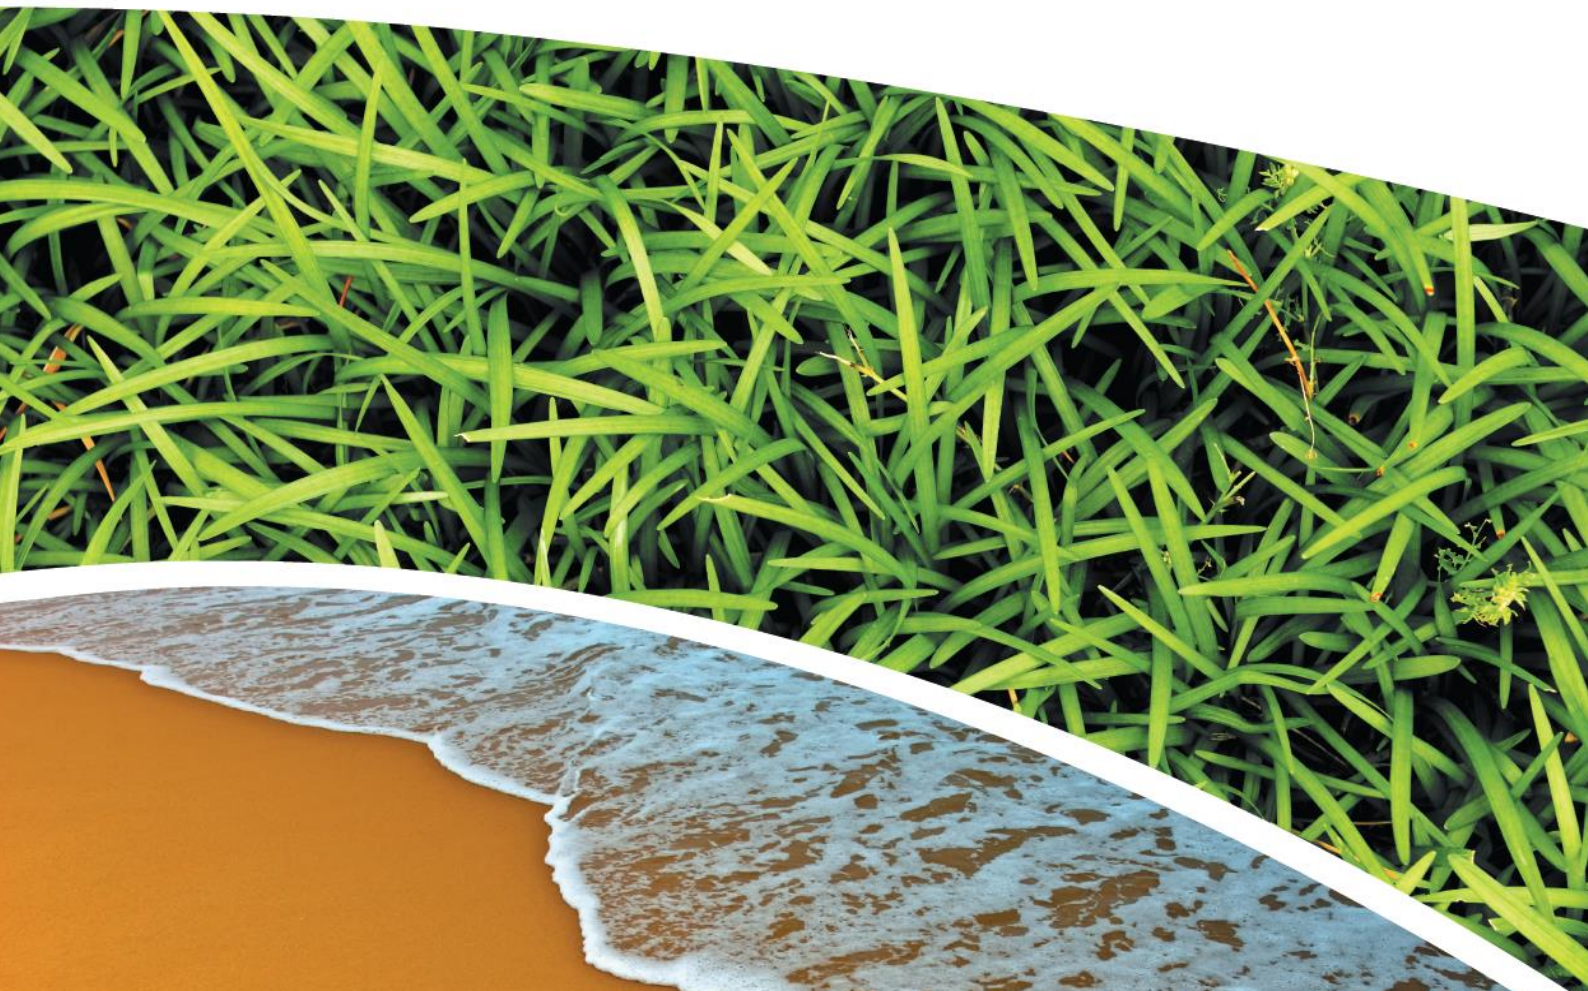

RCA AUSTRALIA
ABN 53 063 515 711

92 Hill Street, CARRINGTON NSW 2294

Telephone: +61 2 4902 9200
Facsimile: +61 2 4902 9299
Email: administrator@rca.com.au
Internet: www.rca.com.au

DOCUMENT STATUS					
Rev No	**Comment**	**Author**	**Approved for Issue (Project Manager)**		
			Name	**Signature**	**Date**
/0	Final	C Rocher	C Rocher		18.3.2019

DOCUMENT DISTRIBUTION				
Rev No	**Copies**	**Format**	**Issued to**	**Date**
/0	1	Electronic (email)	Pine Dale Mine – Graham Goodwin graham.goodwin@energyaustralia.com.au	18.3.2019
/0	1	Electronic (email)	Energy Australia- Mark Frewin mark.frewin@energyaustralia.com.au	18.3.2019
/0	1	Electronic (email)	Lithgow City Council – Andrew Muir andrew.muir@lithgow.nsw.gov.au	18.3.2019
/0	1	Electronic report	RCA – job archive	18.3.2019

Contents

RCA ref 6880-1791/0

18 March 2019

Enhance Place Pty Ltd
PO Box 202
WALLERWANG NSW 2845

Attention: Mr Graham Goodwin

RCA AUSTRALIA
GEOTECHNICAL • ENVIRONMENTAL

Geotechnical Engineering
Engineering Geology
Environmental Engineering
Hydrogeology
Construction Materials Testing
Environmental Monitoring
Sound & Vibration
Occupational Hygiene

REPORT COMPILED FOR COMMUNITY CONSULTATIVE COMMITTEE DETAILING AIR, WATER AND METEOROLOGICAL MONITORING AT PINE DALE MINE

FEBRUARY 2019

1 INTRODUCTION

This report presents the results of air, water and meteorological monitoring undertaken at Pine Dale Mine, Blackmans Flat during the month of February 2019.

Air and water samples were collected by RCA Laboratories – Environmental staff. Meteorological data was obtained from the site weather station.

This report satisfies the requirements to monitor environmental parameters as presented in the Pine Dale Mine Environmental Protection Licence (EPL 4911).

2 ANALYTICAL PROCEDURES

The analytical procedures used by RCA Laboratories – Environmental (NATA Accreditation number 9811) are based on established internationally recognised procedures such as APHA and Australian Standards. Analytical test methods are detailed in **Table 1**.

Table 1 *Analytical Test Methods*

Analysis	Method	Units	Analysing Laboratory	NATA Accreditation Status
Determination of Suspended Particulate Matter	ENV-LAB003	µg/m^3	RCA Laboratories – Environmental	NATA Analysis
Determination of Particulate Matter – Deposited Matter	ENV-LAB004	g/m^2.month	RCA Laboratories – Environmental	NATA Analysis
pH	ENV-LAB006	pH	RCA Laboratories – Environmental	NATA Analysis
Conductivity	ENV-LAB010	µS/cm	RCA Laboratories – Environmental	NATA Analysis
Total Suspended Solids	ENV-LAB009	mg/L	RCA Laboratories – Environmental	NATA Analysis
Turbidity	ENV-LAB037	NTU	RCA Laboratories - Environmental	NATA Analysis
Oil and Grease	ENV-LAB022	mg/L	RCA Laboratories - Environmental	Non-NATA Analysis
Major Anions (Alkalinity, Cl, SO_4)	ED037, ED041, ED045	mg/L	ALS	NATA Analysis
Major Cations (Ca, Mg, Na, K)	ED093	mg/L	ALS	NATA Analysis
Dissolved Metals	EG020F	mg/L	ALS	NATA Analysis

ALS Environmental has been used to obtain analysis of anions, cations and dissolved metals (NATA Accreditation number 825).

3 WATER MONITORING RESULTS

3.1 GROUNDWATER

A total of two (2) groundwater samples were collected from within the Pine Dale Mine site during February 2019. Water quality analysis results are shown in **Table 2**. Groundwater monitoring locations are shown in **Appendix A**.

Table 2 *Groundwater Analysis Results*

Analysis	Units	P6	P7
Sample Number	-	02196880011	02196880012
Date Sampled	-	08/02/19	08/02/19
Time Sampled	-	8:42	9:36
Depth to Water from Surface	m	25.16	6.36
Water Level (AHD)	m	891.79	888.04
Temperature	°C	17.8	18.2
pH	pH	6.31	6.46
Conductivity	µS/cm	**1650**	**877**
Turbidity	NTU	113	
Dissolved Oxygen	mg/L	5	
Total Suspended Solids	mg/L	60	
Oil and Grease	mg/L	<5	
Bicarbonate Alkalinity ($CaCO_3$)	mg/L	27	207
Total Alkalinity ($CaCO_3$)	mg/L	27	207
Sulphate (as SO_4)	mg/L	606	39
Chloride	mg/L	47	116
Calcium	mg/L	158	46
Magnesium	mg/L	72	47
Sodium	mg/L	70	53
Potassium	mg/L	22	8
Cobalt (dissolved)	mg/L	0.063	
Manganese (dissolved)	mg/L	3.01	
Nickel (dissolved)	mg/L	0.109	
Zinc (dissolved)	mg/L	0.131	
Iron (dissolved)	mg/L	33.4	<0.05
Trigger Values			
pH trigger level ^	pH	6.2 – 8.0	6.3 – 8.0
Conductivity trigger level	µS/cm	1180	852
Water Level (AHD) #	m	887.90	883.28

Indicates analysis was not required.

^ pH trigger value is exceeded if the pH is outside the nominated range.

Water Level trigger is exceeded if the AHD water level drops below the nominated trigger level.

Results shown in ***bold italics*** indicates exceedance of trigger level.

3.2 SURFACE WATER MONITORING

Quarterly surface water monitoring was undertaken in February 2019. Results are shown in **Table 3**.

Table 3 *Surface Water Results*

ANALYSIS	UNITS	EPA Point 2 Neubecks Ck Upstream	EPA Point 3 Neubecks Ck Downstream	EPA Point 14 Coxs River Downstream
Sample Number	-	02196880009	02196880004	02196880010
Date Sampled	-	8/02/2019	8/02/2019	8/02/2019
Time Sampled	-	08:18	09:57	06:40
Temperature	°C	20.2	20.9	21.2
pH	pH	7.14	7.38	**8.17**
Conductivity	µS/cm	588	1150	**1210**
Sulfate	NTU	147	326	92
Dissolved Iron	mg/L	0.07	0.56	0.21
Total Suspended Solids	mg/L	<5	6	12
Turbidity	mg/L	3	2	47
Trigger Values				
pH	pH	7.1 – 8.0	6.4 – 8.0	7.5 – 8.0
Conductivity	µS/cm	2055	2223	1166
Total Suspended Solids	mg/L	30	30	30

Results shown in ***bold italics*** indicates exceedance of trigger value.

4 AIR QUALITY RESULTS

4.1 HIGH VOLUME AIR SAMPLERS (HVAS)

Monitoring of particulate matter less than 10 micrometres (PM_{10}) and total suspended particulates (TSP) is undertaken at Pine Dale Mine using High Volume Air Samplers (HVAS). HVAS at this facility conform to AS/NZS 3580.9.3:2015, AS/NZS 3580.9.6:2015 and AS/NZS 3580.1.1:2016. The locations of these HVAS units are shown in **Appendix A**.

HVAS Total Suspended Particulate results are shown in **Table 4**. PM_{10} results are shown in **Table 5**. HVAS Monitoring locations are shown in **Appendix A**. Graphical HVAS result presentations are shown in **Appendix B**.

Table 4 *Total Suspended Particulates (TSP)*

Run Date	TSP (µg/m3)	Sample Number	Filter Number	Date Filter Off	Time Filter Off	Field Tech	Hours Run
01-Feb-19	11	02196880033	9521290	04-Feb-19	8:10	Client	24.00
07-Feb-19	11	02196880035	9519762	08-Feb-19	7:00	Client	24.00
13-Feb-19	200	02196880037	9655146	18-Feb-19	14:32	Client	24.00
19-Feb-19	73	02196880039	9655148	20-Feb-19	16:48	Client	24.00
25-Feb-19	17	02196880041	9655150	27-Feb-19	10:07	Client	24.00

Table 5 *Suspended Particulate Matter <10 µm (PM_{10})*

Run Date	PM_{10} (µg/m^3)	Sample Number	Filter Number	Date Filter Off	Time Filter Off	Field Tech	Hours Run
01-Feb-19	2	02196880034	9519761	04-Feb-19	8:15	Client	24.00
07-Feb-19	5	02196880036	9521283	08-Feb-19	7:05	Client	24.00
13-Feb-19	44	02196880038	9655147	18-Feb-19	14:38	Client	24.00
19-Feb-19	32	02196880040	9655149	20-Feb-19	16:52	Client	24.00
25-Feb-19	10	02196880042	9655151	27-Feb-19	10:10	Client	24.00

4.1.1 TSP SUMMARY

The NSW EPA Annual Mean TSP allowable limit is 90µg/m^3. All TSP HVAS results recorded during this monitoring period are in compliance with consent conditions, as the *current rolling annual mean* (March 2018 to February 2019) for the TSP unit is 29.0µg/m^3. The twelve monthly graph is provided in **Appendix B**.

4.1.2 PM_{10} SUMMARY

The NSW EPA twenty four hour maximum PM_{10} allowable limit is 50µg/m^3. The EPA annual mean PM_{10} allowable limit is 25µg/m^3. All PM_{10} HVAS results recorded during this monitoring period conform to consent conditions, as the *current rolling annual mean* for the PM_{10} unit is 18.6µg/m^3, which is below the allowable annual limit (refer **Appendix B**). The 24 hour maximum allowable limit of 50µg/m^3 was not exceeded on any sampling event during the month of February 2019.

4.2 DEPOSITIONAL DUST MONITORING

The depositional dust monitoring exposure period for February 2019 was 7 January – 7 February 2019. Depositional dust gauges at this facility conform to AS/NZS 3580.10.1:2016 and AS/NZS 3580.1.1:2016. Depositional dust monitoring results are shown in **Table 6**. Depositional dust monitoring locations are shown in **Appendix A**.

Depositional dust gauge D2 is situated on private property; this gauge was removed at the request of the property owner in March 2018 and monitoring has therefore ceased at this location.

Table 6 *Depositional Dust Monitoring*

Deposit Gauge	Number of Days	Notes	Insoluble Solids	Ash	Combustible Matter
D1	31	IT	1.8	1.3	0.5
D3	31	I	2.1	1.5	0.6
D4	31	I	2.6	1.7	0.9
D5	31	I	1.4	1.0	0.4
D6	31	I	2.6	1.9	0.7

All units are g/m^2/month

I indicates insects noted to be present in sample.
T indicates tree litter in samples (eg. leaves, twigs, gum nuts).

4.2.1 ALLOWABLE DEPOSITIONAL DUST LIMITS

The EPA long term (annual average) deposited dust limit is $4g/m^2$ per month. The rolling annual depositional dust results for all sites within the period (March 2018 – February 2019) are in compliance with consent conditions. The annual average for dust gauges D1, D3, D4, D5 and D6 are all less than or equal to $1.4g/m^2$ per month. The depositional dust gauge graphs are provided in **Appendix B**.

5 METEOROLOGICAL MONITORING

Pine Dale Mine records meteorological data continuously via an onsite weather station. Details of the weather data recorded during the period 1 to 28 February 2019 are shown in **Appendix C**.

Data availability during this period was 100%.

6 BLASTING RESULTS

No blasting was undertaken during this month as mining operations have ceased since the end of March 2014.

7 NOISE MONITORING RESULTS

Quarterly noise monitoring is required to be undertaken on a quarterly basis. The first quarter monitoring is required to be undertaken in the January – March 2019 and is scheduled for March 2019.

8 OPERATIONAL ACTIVITIES

All of the approved minable reserves at the Pine Dale Mine have now been exhausted. Operational mining and the last coal sales ceased as of the end of March 2014.

All former operators have been made redundant; however some statutory positions still remain. Pine Dale Mine has been placed in care and maintenance since April 2014.

9 SUMMARY

During the month of February 2019 environmental monitoring results were found to be generally in compliance with EPL 4911 with the exception of:

- Electrical conductivity in groundwater sample P6 and P7 was in excess of the of the site specific trigger value.
- pH and electrical conductivity in surface water sample EPA Point 14 was in excess of the trigger values.

Rolling annual averages from both the TSP and PM_{10} High Volume Air Samplers are currently below the EPA Annual Mean TSP and PM_{10} criterion of 90µg/m^3 and 25µg/m^3 respectively. Currently there are no depositional dust gauge results which are greater than the EPA Long Term (annual average) criteria of 4g/m^2.month based upon a rolling average of the past 12 months.

Meteorological monitoring was undertaken for the entire month of February with 100% data capture.

Pine Dale Mine ceased operation in March 2014 and therefore no blasting occurred at the site. No noise monitoring was undertaken during February 2019.

This report shall only be presented in full and may not be used to support objectives other than those stated in the report without written permission from RCA Australia.

The information in this report is considered accurate at the date of issue with regard to the current conditions of the site. Conditions can vary across any site that cannot be explicitly defined by investigation.

Yours faithfully

RCA AUSTRALIA



Carmen Rocher
Environmental Engineer

Appendix A

Monitoring Locations

EP PDH7/GW Site E

EP DDH7/GW Site A

EP DDH5/GW Site B

EP DDH1/GW Site C

EP DDH4/GW Site D

Bong Water

EPL Site 2

S1

Weather Station

S2

S3

Old Shaft

P6

S4

S5

S6

EPL Site 13

P7

S7

EP PDH4/GW

EP PDH3GW

EPL Site 14

EPL Site 14

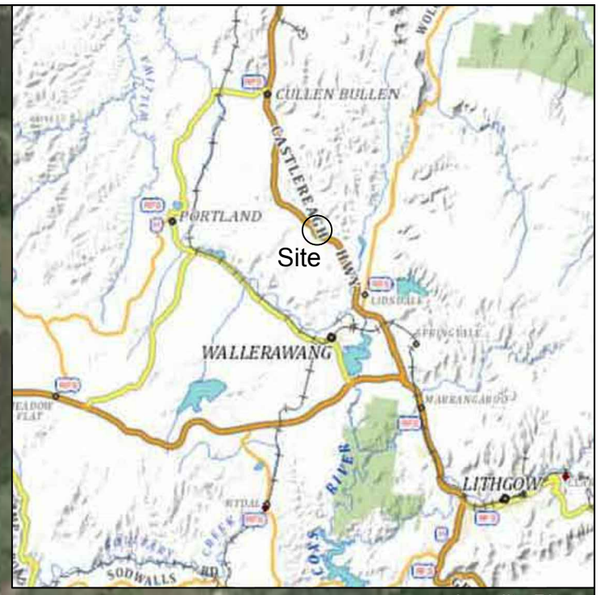

Locality Plan
N.T.S.

LEGEND

- Surface water monitoring location
- Groundwater monitoring location
- Enhance groundwater monitoring location
- Meteorological monitoring location

Aerial image taken from Google Earth, November 12 2014

0 200 400 600 800 1000
metres

CDT-DWG-A3H-001/1

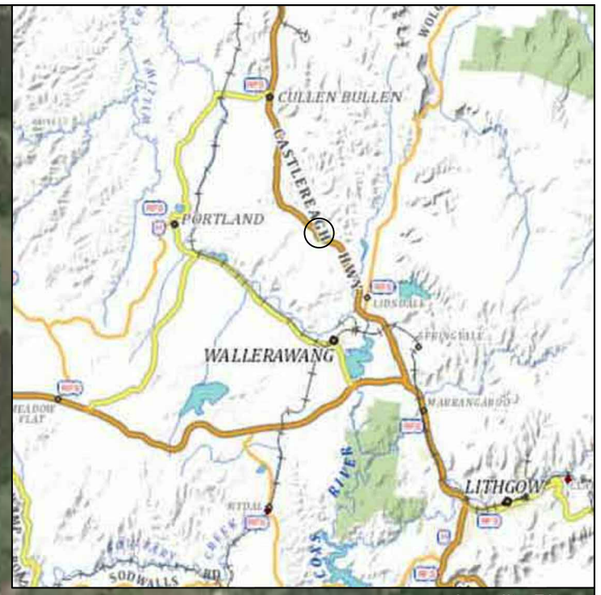

Locality Plan
N.T.S.

PCB1
PCB7
Weather Station
HVAS
D1
PCB2
PCB3
D2
D3
D4
D5
D6

LEGEND

- Depositional dust monitoring location
- High volume air sampling location
- Meteorological monitoring location

Aerial image taken from Google Earth, November 12 2014

0 200 400 600 800 1000
metres

CDT-DWG-A3H-001/1

Appendix B

Depositional Dust and HVAS Graphs

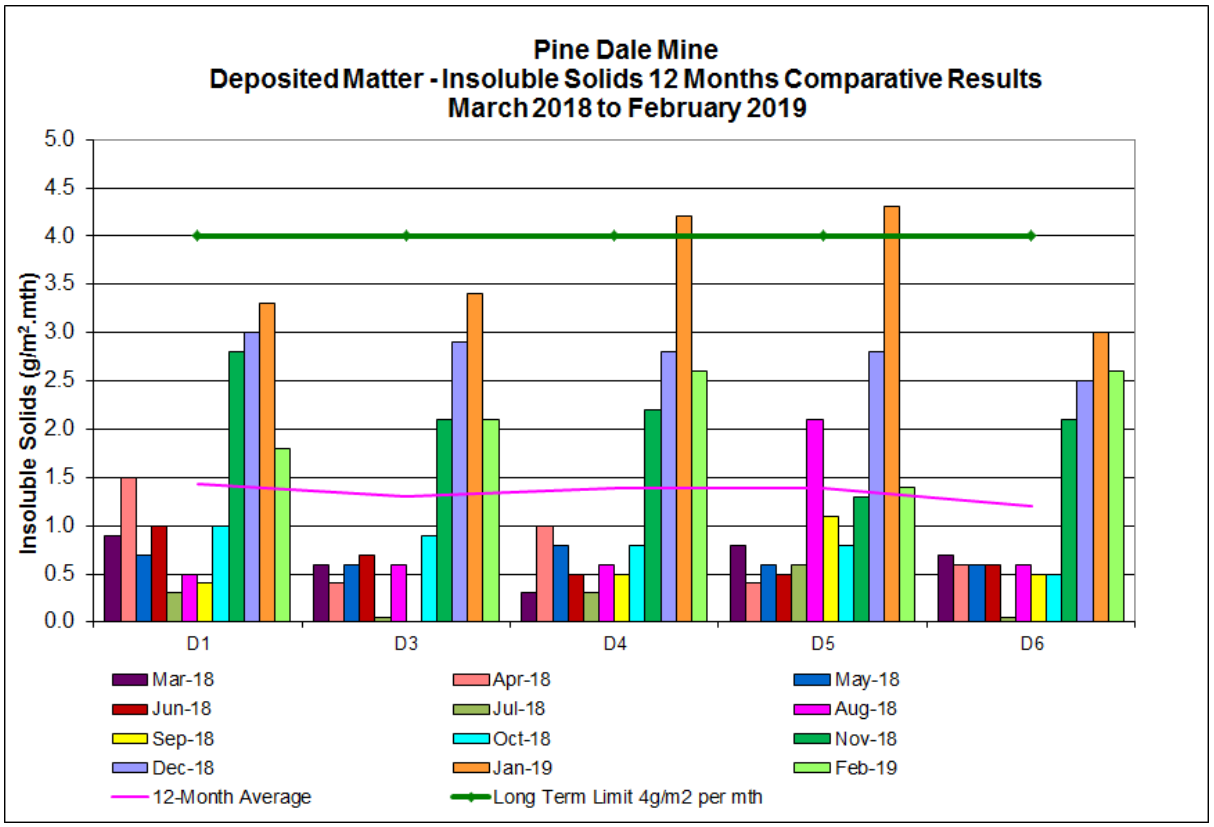
Pine Dale Mine
Deposited Matter - Insoluble Solids 12 Months Comparative Results
March 2018 to February 2019
Insoluble Solids (g/m².mth)
5.0
4.5
4.0
3.5
3.0
2.5
2.0
1.5
1.0
0.5
0.0
D1
D3
D4
D5
D6
Mar-18
Apr-18
May-18
Jun-18
Jul-18
Aug-18
Sep-18
Oct-18
Nov-18
Dec-18
Jan-19
Feb-19
12-Month Average
Long Term Limit 4g/m2 per mth

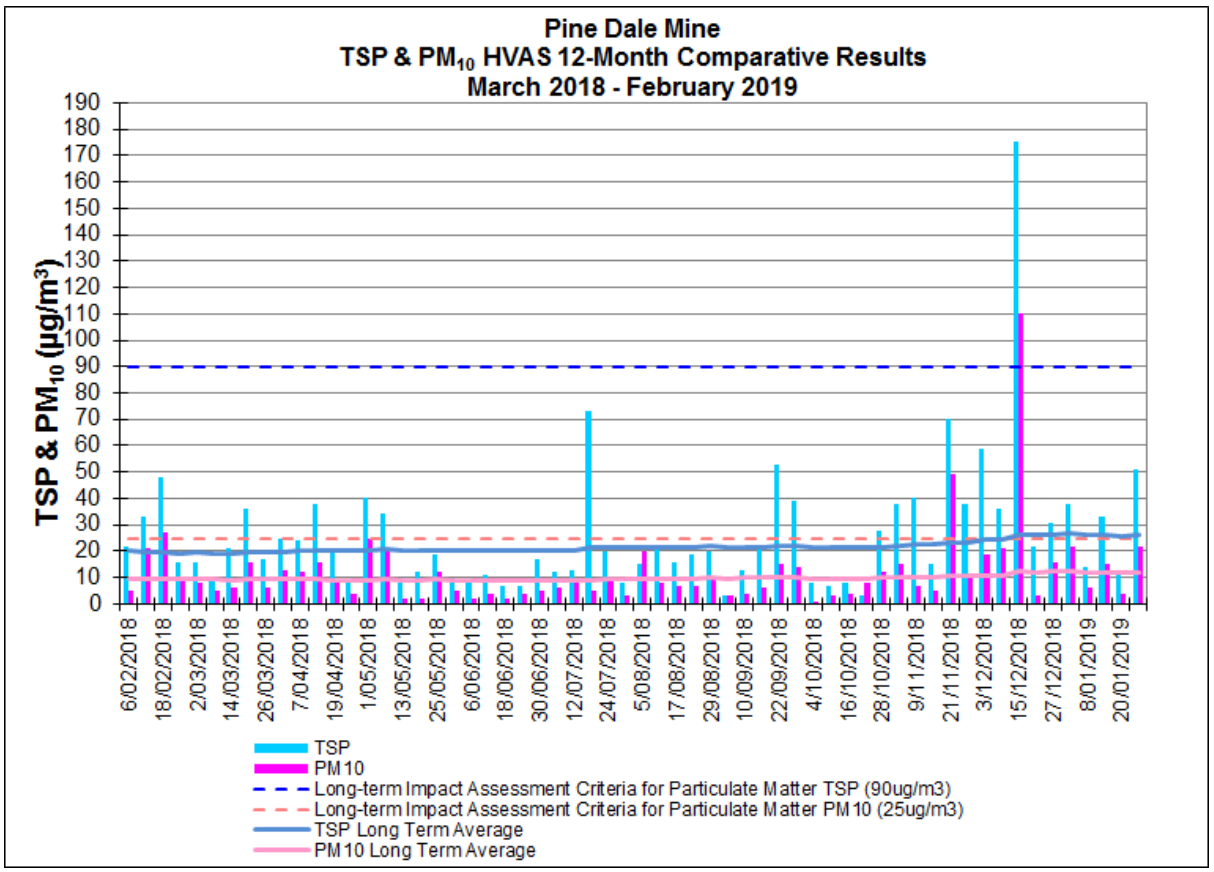
Pine Dale Mine
TSP & PM10 HVAS 12-Month Comparative Results
March 2018 - February 2019
TSP & PM10 (µg/m³)
190
180
170
160
150
140
130
120
110
100
90
80
70
60
50
40
30
20
10
0
6/02/2018
18/02/2018
2/03/2018
14/03/2018
26/03/2018
7/04/2018
19/04/2018
1/05/2018
13/05/2018
25/05/2018
6/06/2018
18/06/2018
30/06/2018
12/07/2018
24/07/2018
5/08/2018
17/08/2018
29/08/2018
10/09/2018
22/09/2018
4/10/2018
16/10/2018
28/10/2018
9/11/2018
21/11/2018
3/12/2018
15/12/2018
27/12/2018
8/01/2019
20/01/2019
TSP
PM10
Long-term Impact Assessment Criteria for Particulate Matter TSP (90ug/m3)
Long-term Impact Assessment Criteria for Particulate Matter PM10 (25ug/m3)
TSP Long Term Average
PM10 Long Term Average

Appendix C

Meteorological Data

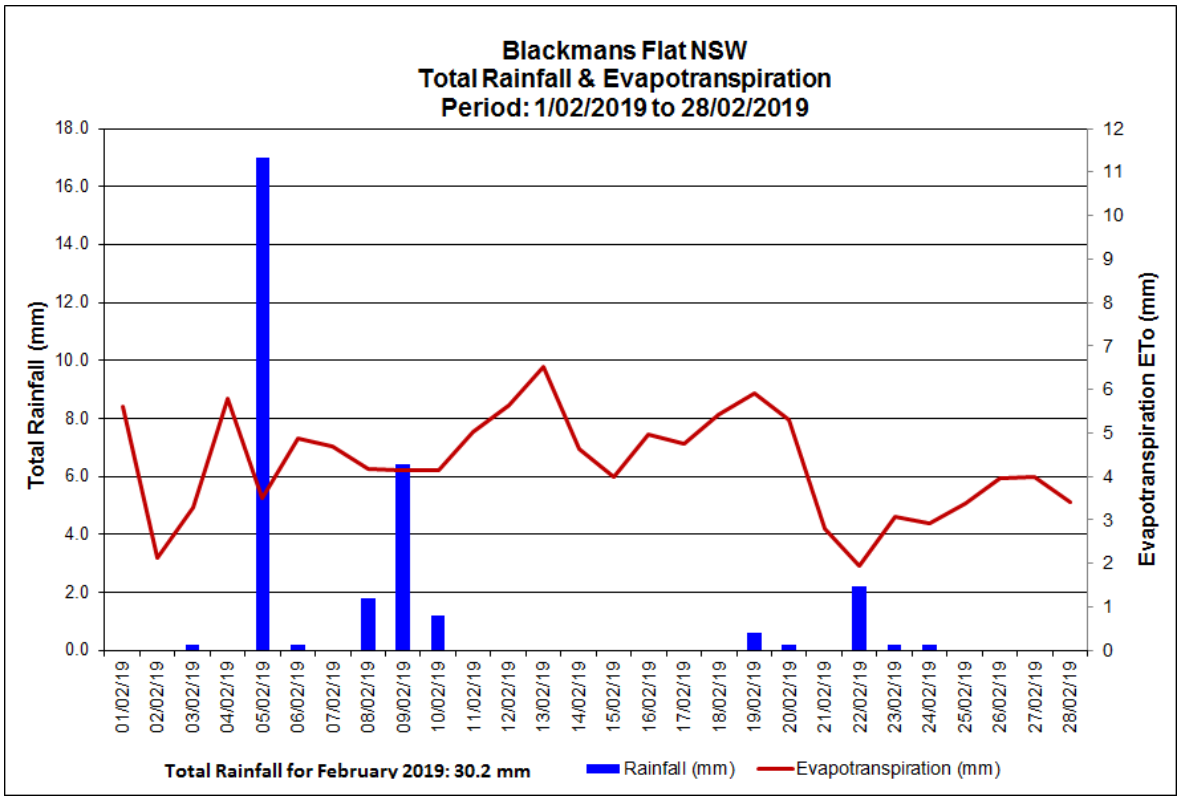
Blackmans Flat NSW
Total Rainfall & Evapotranspiration
Period: 1/02/2019 to 28/02/2019
Total Rainfall (mm)
Evapotranspiration ETo (mm)
Total Rainfall for February 2019: 30.2 mm
Rainfall (mm)
Evapotranspiration (mm)

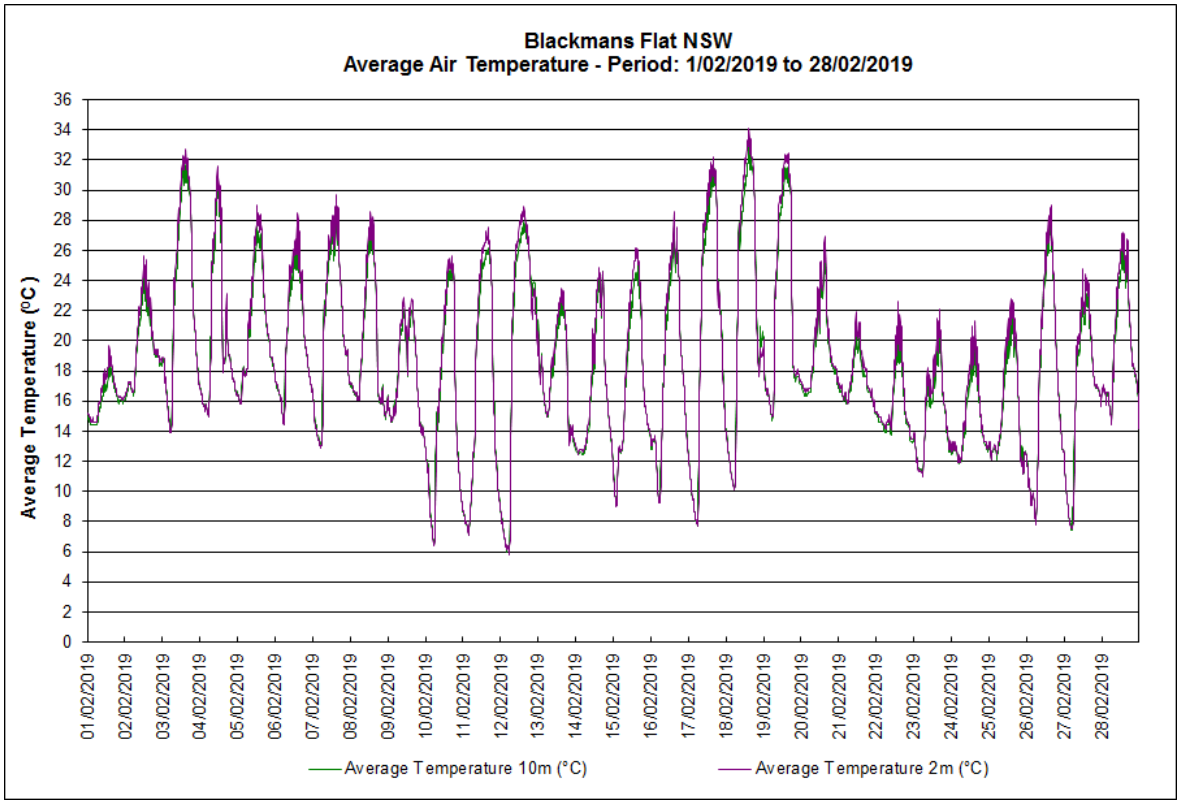
Blackmans Flat NSW
Average Air Temperature - Period: 1/02/2019 to 28/02/2019
Average Temperature (°C)
Average Temperature 10m (°C)
Average Temperature 2m (°C)

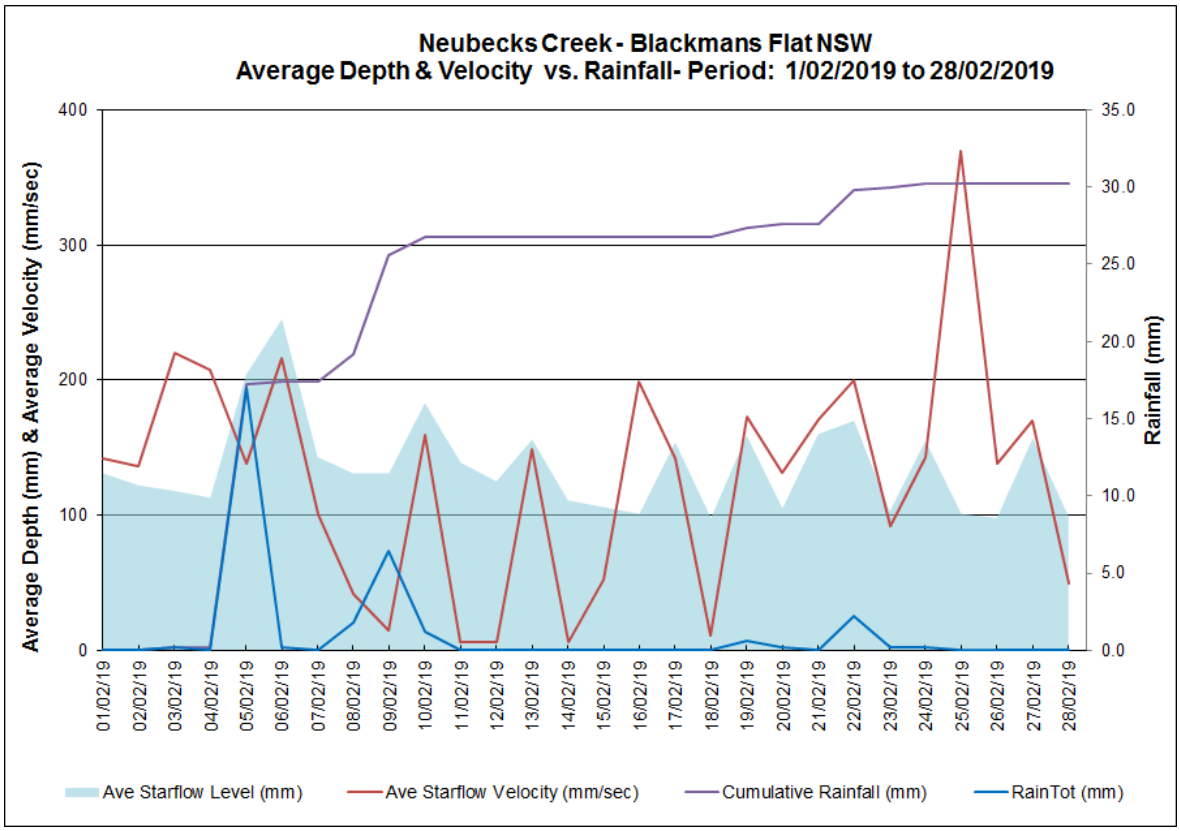
Neubecks Creek - Blackmans Flat NSW
Average Depth & Velocity vs. Rainfall- Period: 1/02/2019 to 28/02/2019
Average Depth (mm) & Average Velocity (mm/sec)
Rainfall (mm)
400
300
200
100
0
35.0
30.0
25.0
20.0
15.0
10.0
5.0
0.0
01/02/19
02/02/19
03/02/19
04/02/19
05/02/19
06/02/19
07/02/19
08/02/19
09/02/19
10/02/19
11/02/19
12/02/19
13/02/19
14/02/19
15/02/19
16/02/19
17/02/19
18/02/19
19/02/19
20/02/19
21/02/19
22/02/19
23/02/19
24/02/19
25/02/19
26/02/19
27/02/19
28/02/19
Ave Starflow Level (mm)
Ave Starflow Velocity (mm/sec)
Cumulative Rainfall (mm)
RainTot (mm)

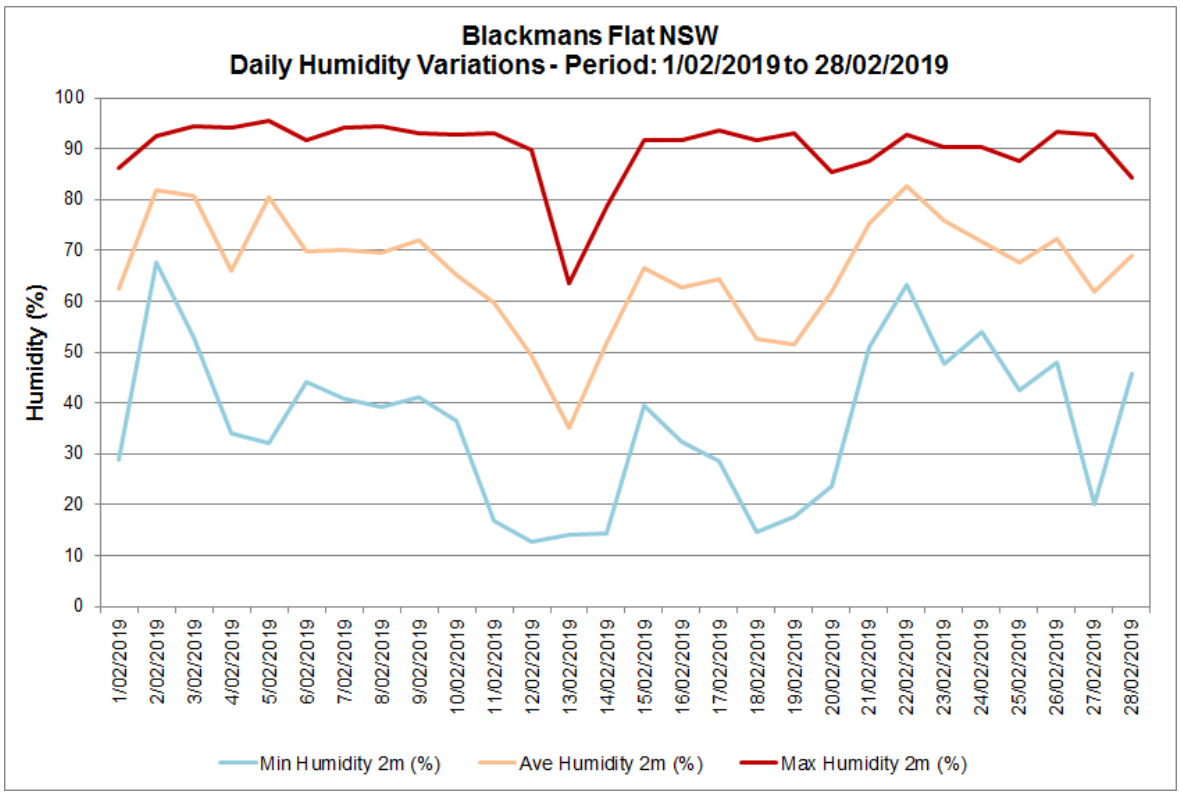
Blackmans Flat NSW
Daily Humidity Variations - Period: 1/02/2019 to 28/02/2019
Humidity (%)
100
90
80
70
60
50
40
30
20
10
0
1/02/2019
2/02/2019
3/02/2019
4/02/2019
5/02/2019
6/02/2019
7/02/2019
8/02/2019
9/02/2019
10/02/2019
11/02/2019
12/02/2019
13/02/2019
14/02/2019
15/02/2019
16/02/2019
17/02/2019
18/02/2019
19/02/2019
20/02/2019
21/02/2019
22/02/2019
23/02/2019
24/02/2019
25/02/2019
26/02/2019
27/02/2019
28/02/2019
Min Humidity 2m (%)
Ave Humidity 2m (%)
Max Humidity 2m (%)

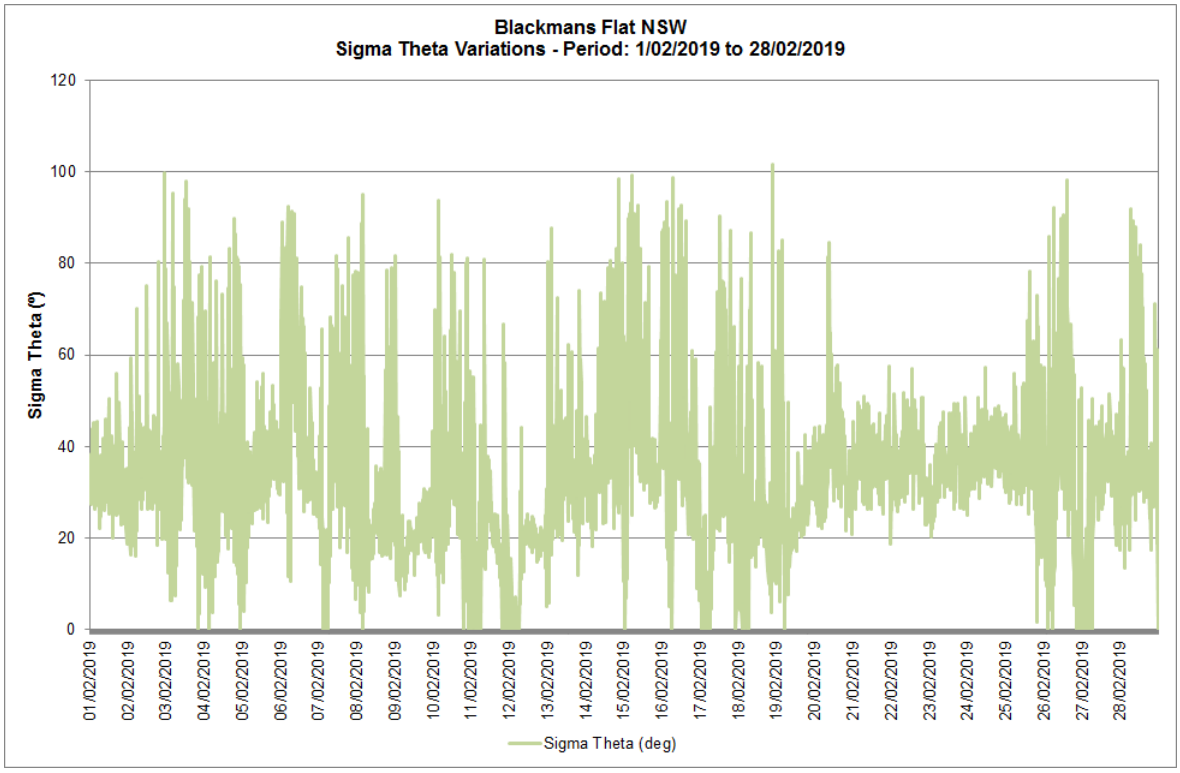
Blackmans Flat NSW
Sigma Theta Variations - Period: 1/02/2019 to 28/02/2019
Sigma Theta (°)
120
100
80
60
40
20
0
01/02/2019
02/02/2019
03/02/2019
04/02/2019
05/02/2019
06/02/2019
07/02/2019
08/02/2019
09/02/2019
10/02/2019
11/02/2019
12/02/2019
13/02/2019
14/02/2019
15/02/2019
16/02/2019
17/02/2019
18/02/2019
19/02/2019
20/02/2019
21/02/2019
22/02/2019
23/02/2019
24/02/2019
25/02/2019
26/02/2019
27/02/2019
28/02/2019
Sigma Theta (deg)

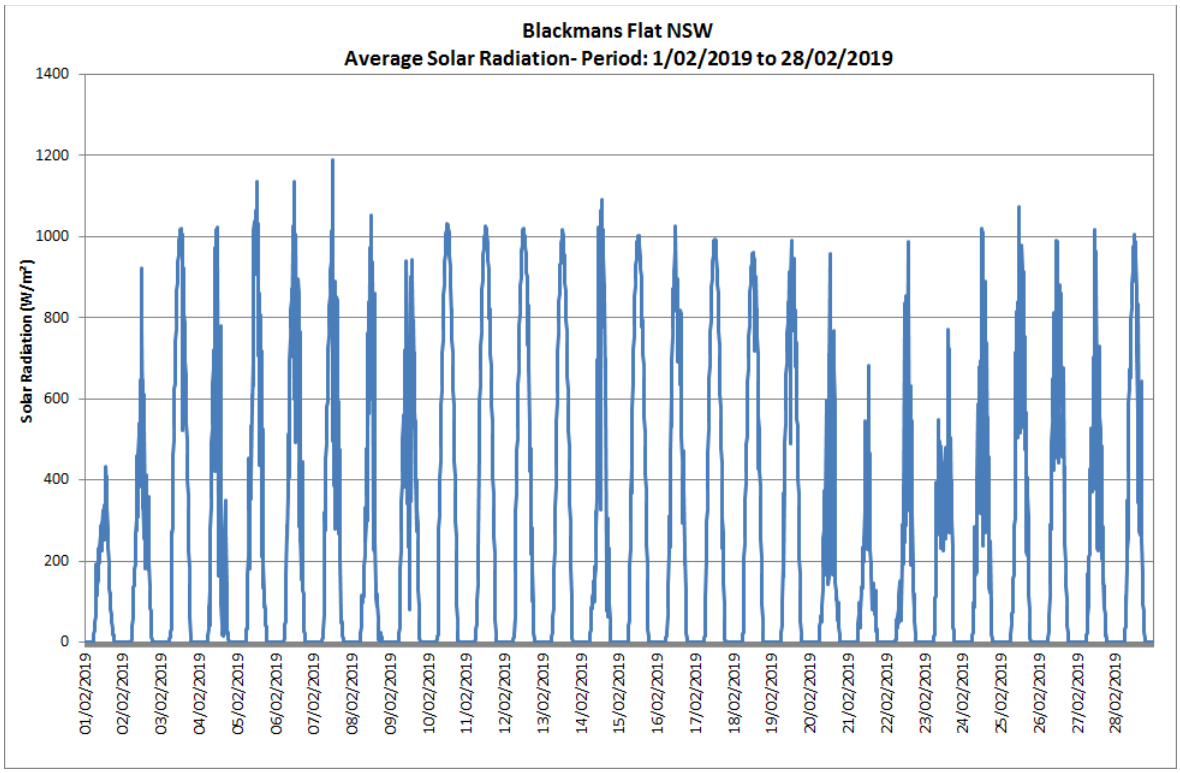
Blackmans Flat NSW
Average Solar Radiation- Period: 1/02/2019 to 28/02/2019
Solar Radiation (W/m²)
1400
1200
1000
800
600
400
200
0
01/02/2019
02/02/2019
03/02/2019
04/02/2019
05/02/2019
06/02/2019
07/02/2019
08/02/2019
09/02/2019
10/02/2019
11/02/2019
12/02/2019
13/02/2019
14/02/2019
15/02/2019
16/02/2019
17/02/2019
18/02/2019
19/02/2019
20/02/2019
21/02/2019
22/02/2019
23/02/2019
24/02/2019
25/02/2019
26/02/2019
27/02/2019
28/02/2019

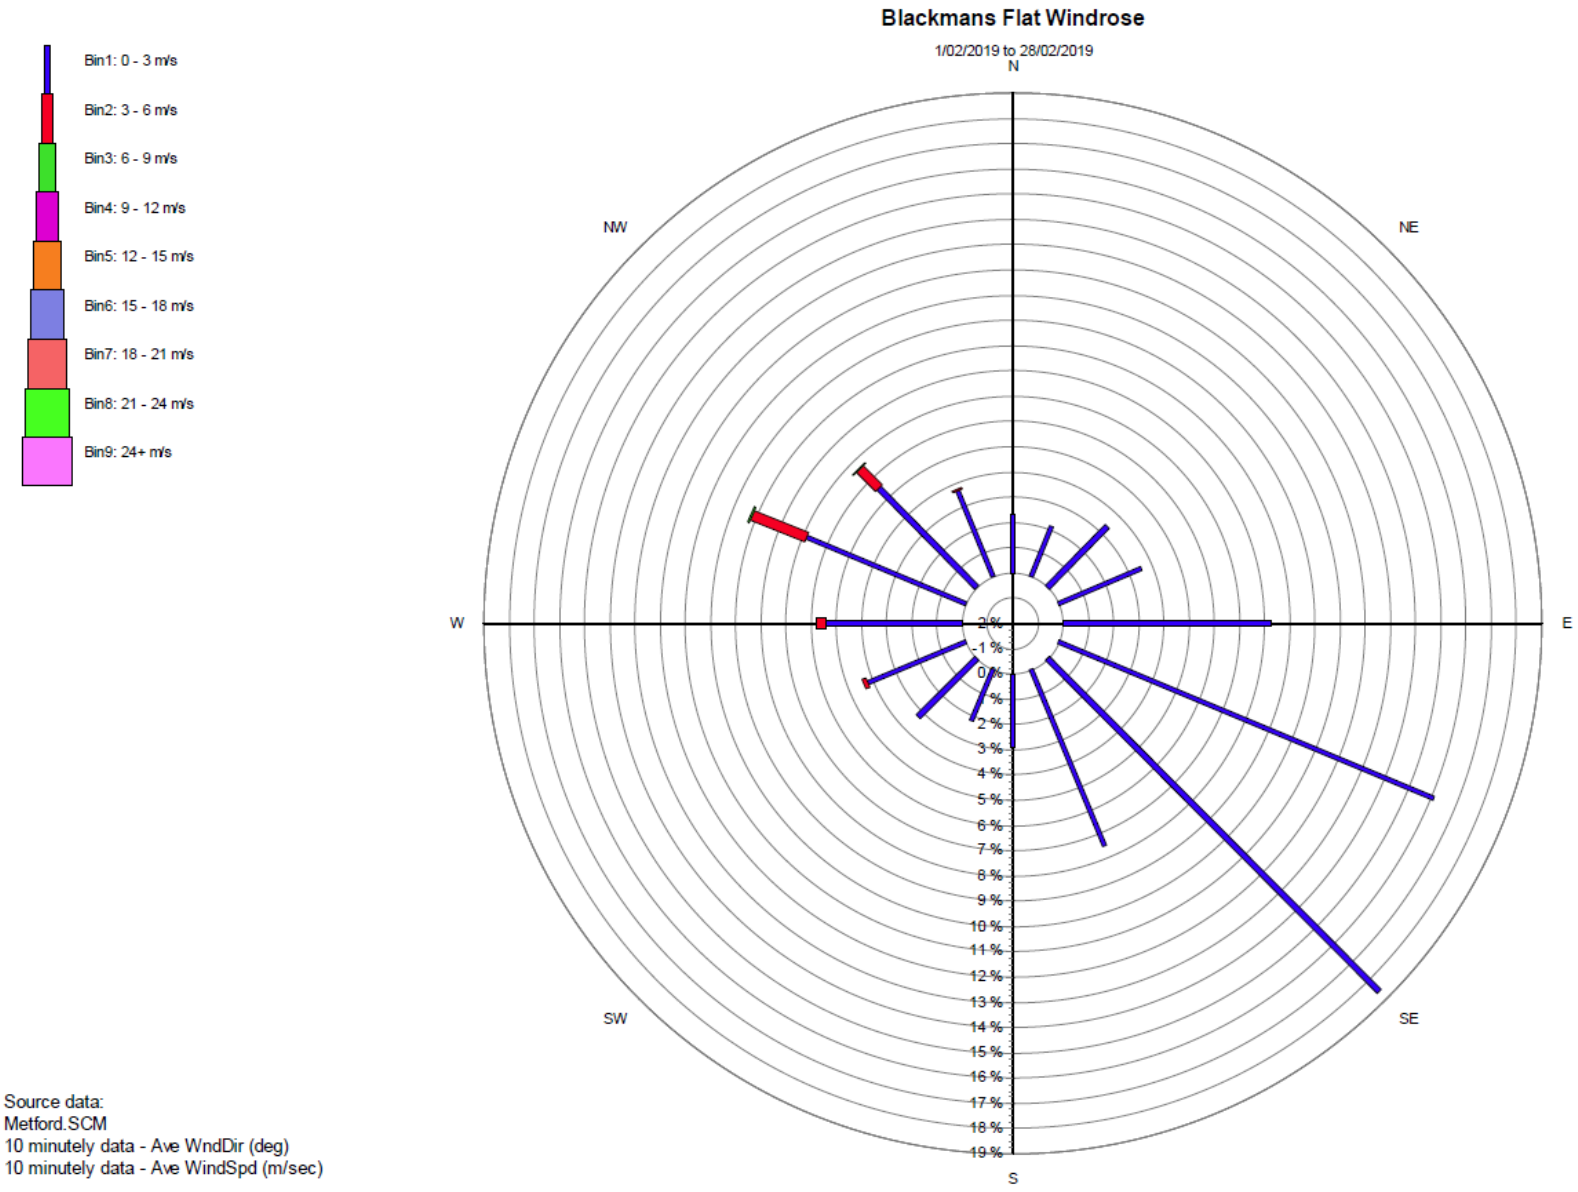

Source data:
Metford.SCM
10 minutely data - Ave WndDir (deg)
10 minutely data - Ave WindSpd (m/sec)